



User Guide Standards

1.1" ePaper Display (VB3300-AAB)

Table of Contents

| | |
|---|-----------|
| Firmware Update SOP | 1 |
| 1 Hardware Guide | 1 |
| (1) Hardware Requirements..... | 1 |
| (2) Hardware Installation | 1 |
| 2 Software Guide..... | 3 |
| (1) Software Requirements | 3 |
| (2) Firmware Update by Application Software | 4 |
| ePaper Display Update SOP | 6 |
| 1 Introduction | 6 |
| (1) Package Contents..... | 7 |
| 2 Hardware Guide | 8 |
| (1) Hardware RequiRements | 8 |
| (2) Demo Kit Hardware Description | 9 |
| (3) Hardware Installation | 10 |
| 3 Software Guide..... | 13 |
| (1) Demo Kit Connection..... | 13 |
| (2) Uploading Image..... | 13 |
| 4 Troubleshooting | 14 |
| 5 Contact Information | 14 |
| 6 Legal Information | 14 |


Firmware Update SOP

1 Hardware Guide

(1) Hardware Requirements

Buy a set of MSP-EXP430G2 from Digi-Key


You will get following stuffs in the package

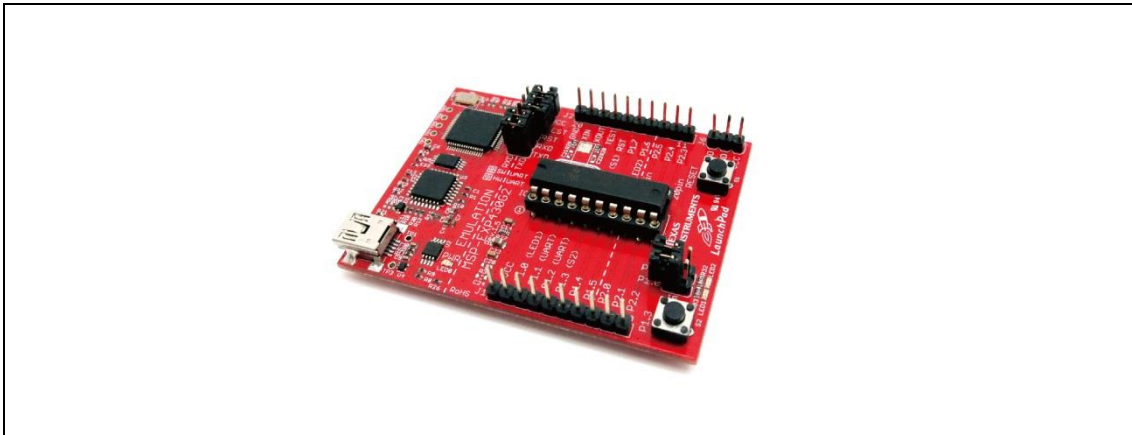

MSP-EXP430G2

(2) Hardware Installation

The programmer need the jump line as the picture below

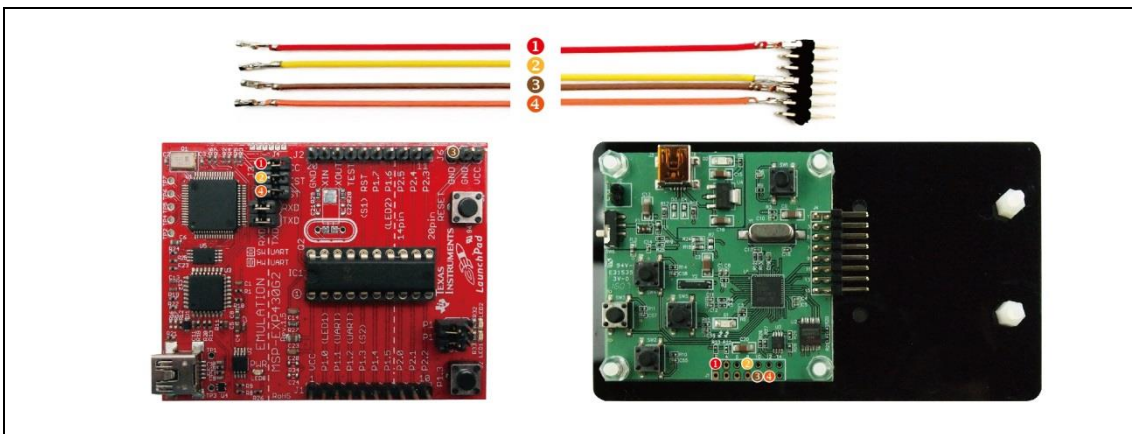

Connect to MSP430 and HULK MCU board

- Please connect the Dupont line from J3 (VCC pin) of MSP430 LaunchPad to J1's 2nd pin of HULK
- Please connect the Dupont line from J3 (TEST pin) of MSP430 LaunchPad to J1's 8th

pin of HULK


- Please connect the Dupont line from J3 (RST pin) of MSP430 LaunchPad to J1's 11th pin of HULK
- Please connect the Dupont line from J6 (GND pin) of MSP430 LaunchPad to J1's 9th pin of HULK

Please pay attention! It must remove the HULK's adapter board when updating Firmware.

When you update Firmware, please confirm if the D2(power indicator) or D2(power indicator) and D1(data indicator) of HULK are lighted.

- It can update Firmware when indicators are lighted.
- If the indicators are not lighted, please confirm the connect again.

Refer to following figure to setup MSP-EXP430G2 and connect it to your PC

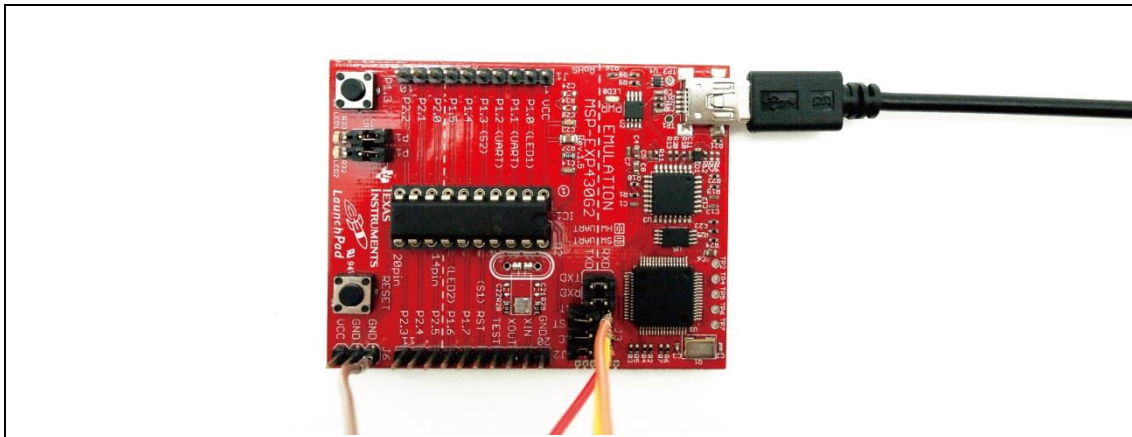




Connect to PC

2 Software Guide


(1) Software Requirements

Refer the guideline in following FET-Pro430 Lite website to download and setup driver of MSP-EXP430G2

<https://www.elprotronic.com/pages/downloads>

| FET-Pro-430 | |
|---|---|
| Inst. package for FET-Pro-430, includes GUI, DLL, and supporting material. Standard. V3.52 (TI-DLL V3.15.00.00) (28.Mar.2020) |  |
| Inst. package for FET-Pro-430-LITE, includes GUI, and supporting material. Lite. V3.52 (TI-DLL V3.15.00.00) (28.Mar.2020) |  |
| REP430F | |
| Installation package for REP430F, and supporting material. |  |

Refer to following figure to connect MSP-EXP430G2 with your PC and HULK together.

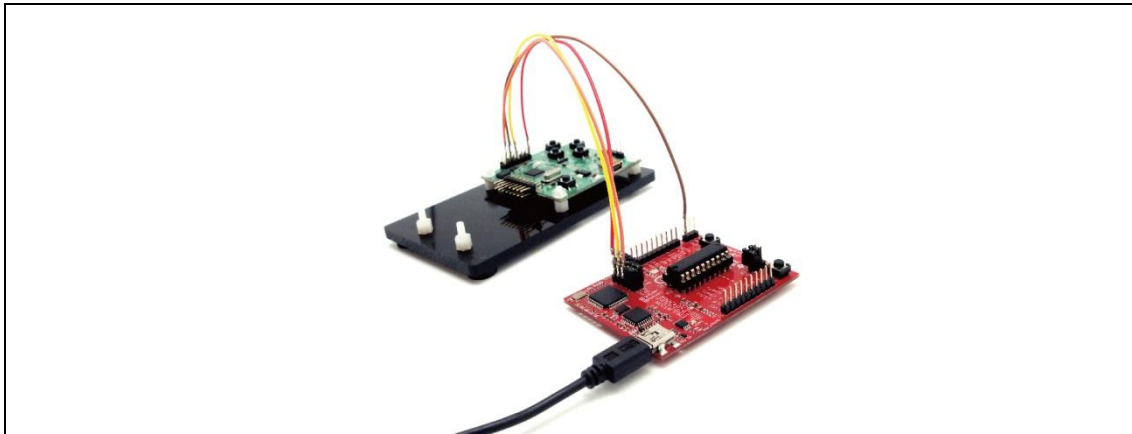


Connect to PC

(2) Firmware Update by Application Software


Press drop-down menu "Microcontroller Type" to select a MCU model MSP430F5502

Please check "Port USB Automatic" to select 4-wires

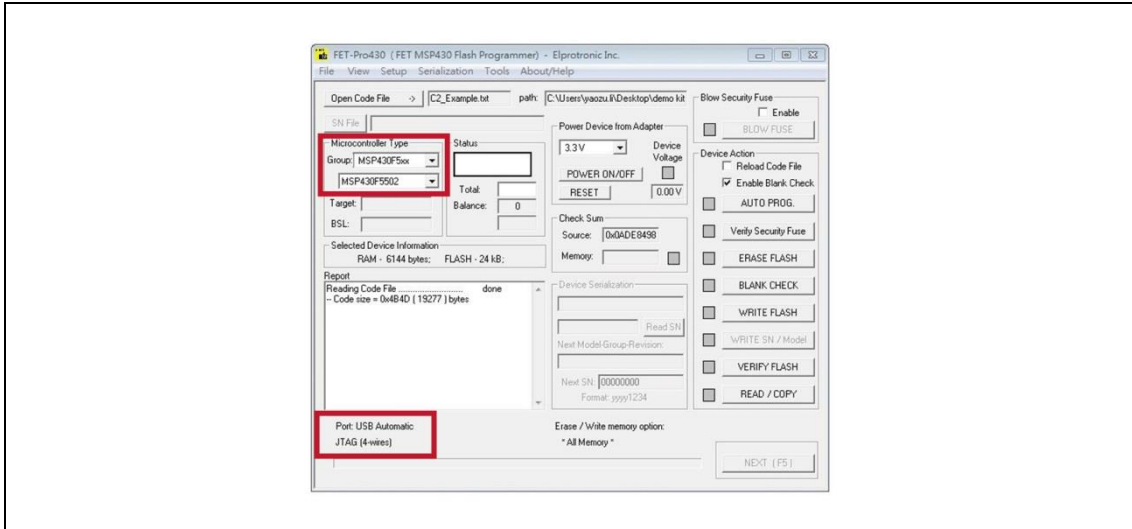


Press "Open code file" button to select a firmware file (.txt)

Press "AUTO PROG" button to update the firmware into MCU

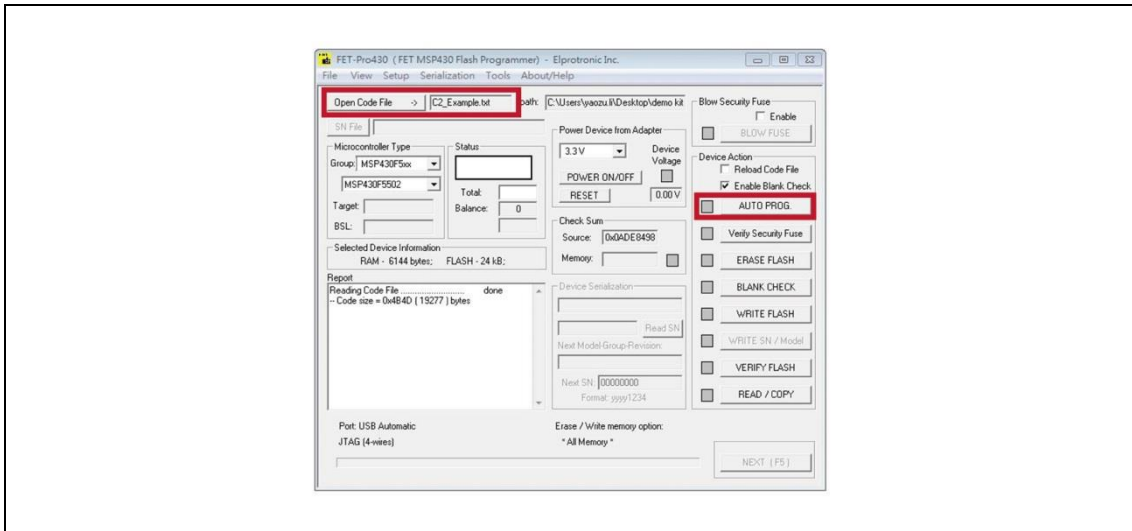

Show the Pass is firmware update ok.

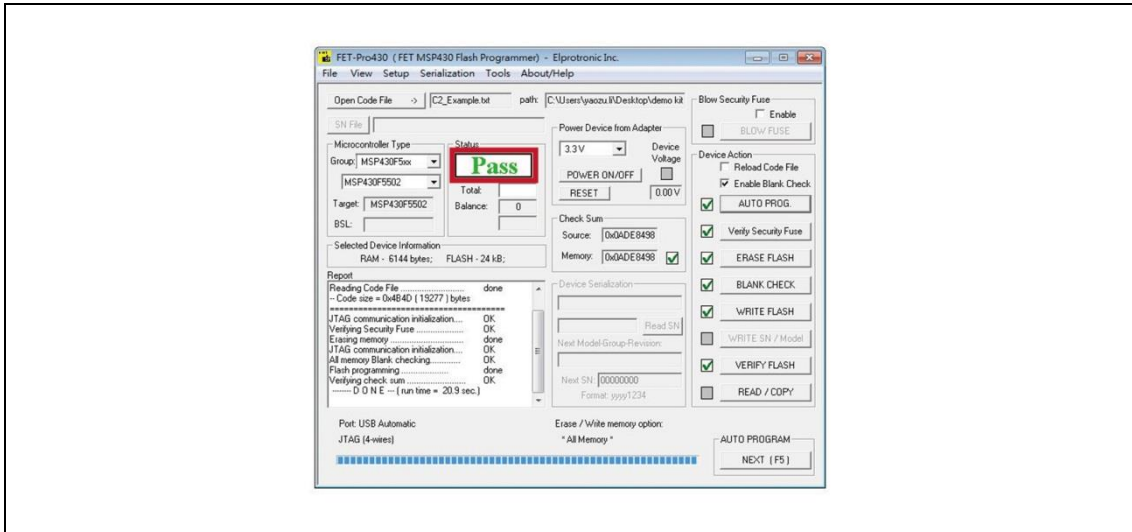

ePaper Display Update SOP

1 Introduction

HULK - demo kit, with 1.1" ePaper Display (VB3300-AAB), allows E Ink clients to access hardware and software for evaluation. This kit demonstrates as a turnkey solution for those who are interested in designing with E Ink displays. Hardware and software design support is available from E Ink directly.

1.1" ePaper Display (VB3300-AAB) is suitable for various applications, e.g. Wearable (watch and activity tracker)

The low power consumption of 1.1" ePaper Display (VB3300-AAB) is ideal for applications such as electronic shelf labels and indicators.

An All-in-one IC is embedded in the EPD, it includes source/gate driver, TCON (Timing controller), PMIC (power management IC) and Temp. sensor. It allows users to rapidly design systems by using E Ink displays.

The kit allows E Ink clients to experience loading and viewing custom images on 1.1" ePaper Display (VB3300-AAB). The use of MCU board to drive an E Ink ePaper Display is demonstrated with the kit.

IAR Integrated Development Environment (IDE) is adopted to write, download, and debug an application.

(1) Package Contents

This demo kit contains the following:

- 1.1" ePaper Display (VB3300-AAB)




Specification

| Item | Specification |
|---------------------------------|--|
| MCU | MSP430 |
| TCON Solution | Hardware TCON |
| E Ink Display Panel | |
| Dimension (W × H × D, unit: mm) | 31.8(W) × 34.6(H) × 0.49(D) (without masking film) |
| Shape | Round |
| Resolution | 240(H) × 240(V), |
| Controller Board | |
| Input | 5V(USB), power on when connected to PC |

2 Hardware Guide

(1) Hardware Requirements

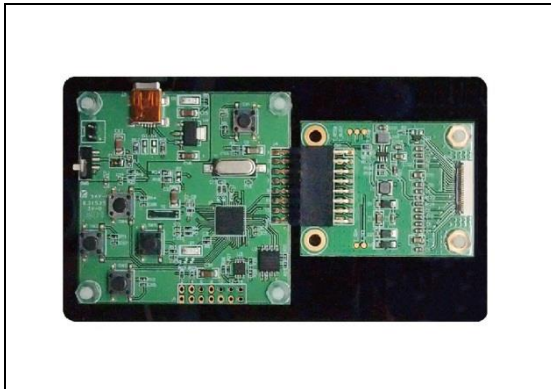

MCU board



EPD panel



Mini USB cable




Windows PC

Minimum PC Requirements

| | |
|--------------------------|------------------------------|
| CPU | Pentium III 800 MHz or later |
| RAM | 128MB or greater |
| Required Software | Windows XP |
| Interface | USB port |


(2) Demo Kit Hardware Description

The HULK_1.1" demo kit includes an MCU board and an E Ink display adapter board. The MCU board and E Ink display adapter board are connected via a 16 pin header. The mini USB port on the demo kit supplies data and power to the MCU board and E Ink panel. Using the E Ink PC application, users can send image data to the board or update settings.

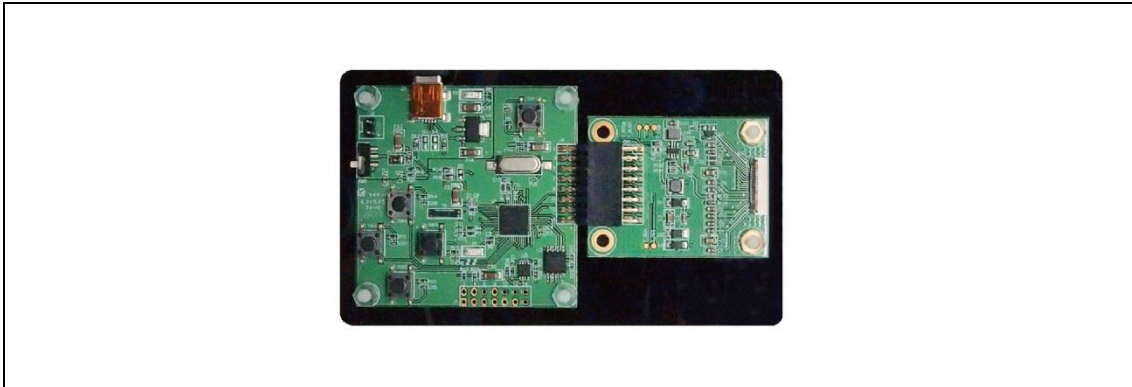

Demo Kit

There are two LEDs on the MCU board, LED 1 and LED 2. LED 1 indicates the board is powered. LED 2 is used as a multi-purpose function light

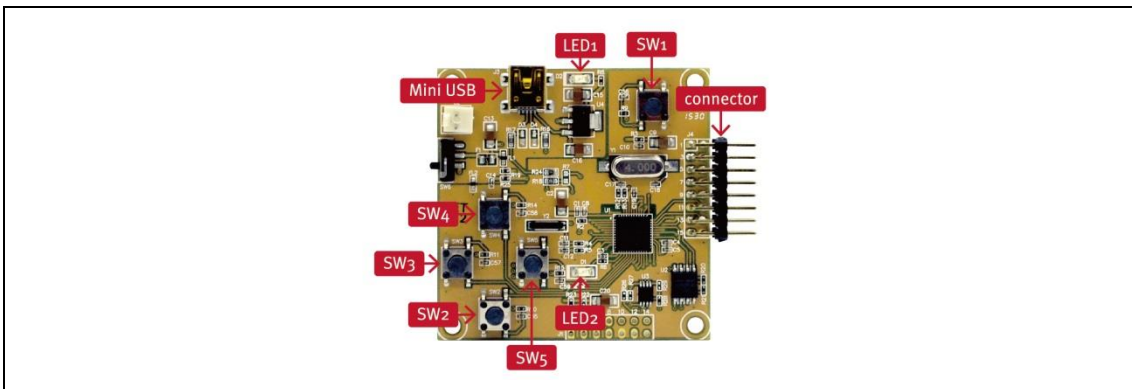

MCU Board for Demo Kit

* When LED2 is light on, EPD can't accept any command

Four push button switches are also on the MCU board. The table below provides a short description of the functions for each button.



Description of button functions

| Button | Function |
|--------|---------------------------|
| SW1 | Reset |
| SW2 | Display NEXT image |
| SW3 | Slide Show Mode |
| SW4 | Display PREVIOUS image |
| SW5 | Display White/Black image |


(3) Hardware Installation

The HULK_1.1" demo kit is connected to a PC via a mini USB cable. The PC requires a USB driver to be installed on the PC.


Connect one end of the mini-USB cable to the HULK_1.1" demo kit and other end to a USB port on a PC.

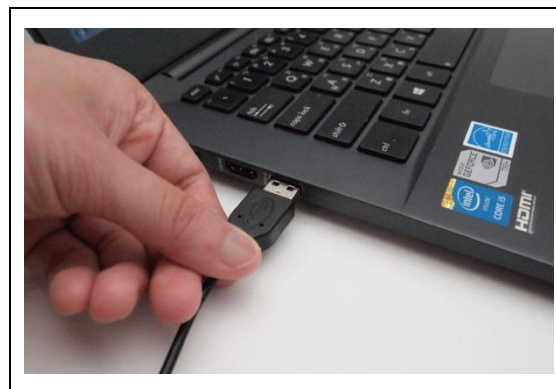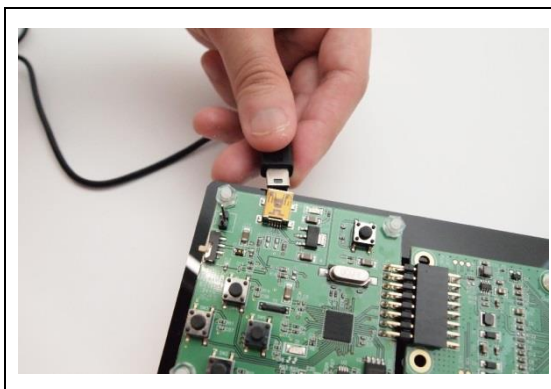

Open Device Manager on the computer. A new device called **MSP430-USB Example** should be in the list. If this is the first time setting up the hardware, installation of the device driver is required.

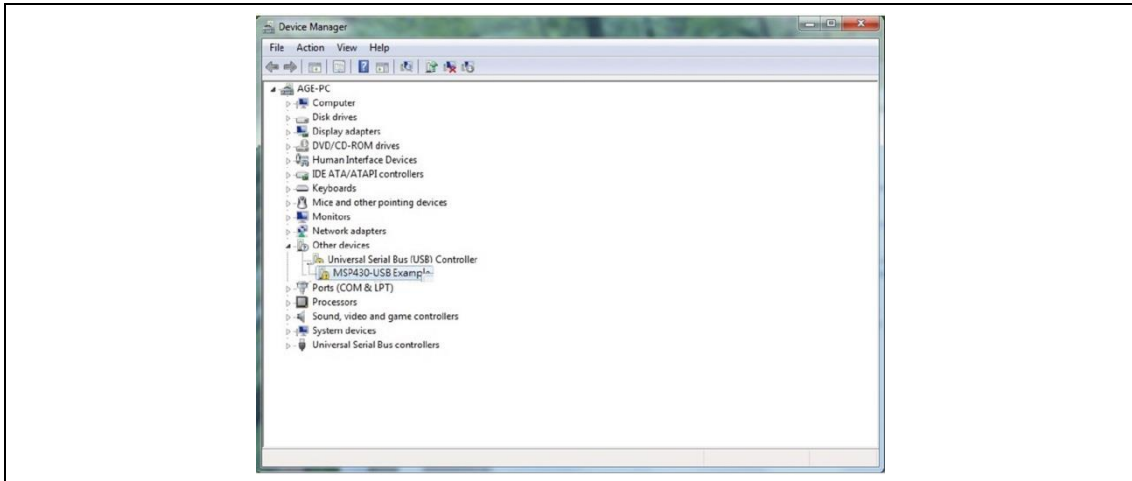


To install the device driver for **MSP430-USB Example**, double click on the device to bring up the device Window. Click on "Update Driver" and select the file "HULK-USB-Driver.inf".

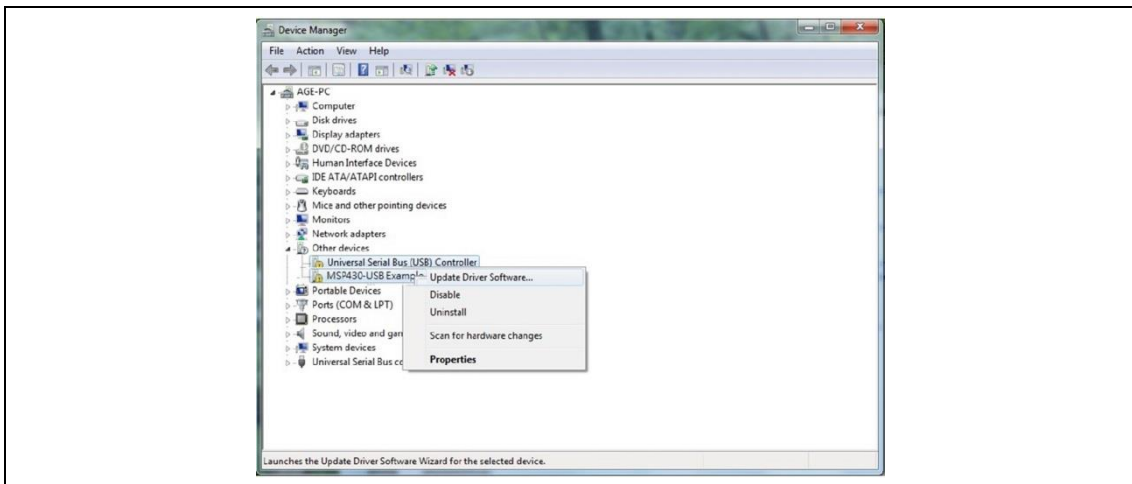

* This driver has been tested on Windows 7 64-bits


To verify the installation of the driver was successful, a new device called **Virtual COM Port (CDC)** should be present under **COM LPT**.

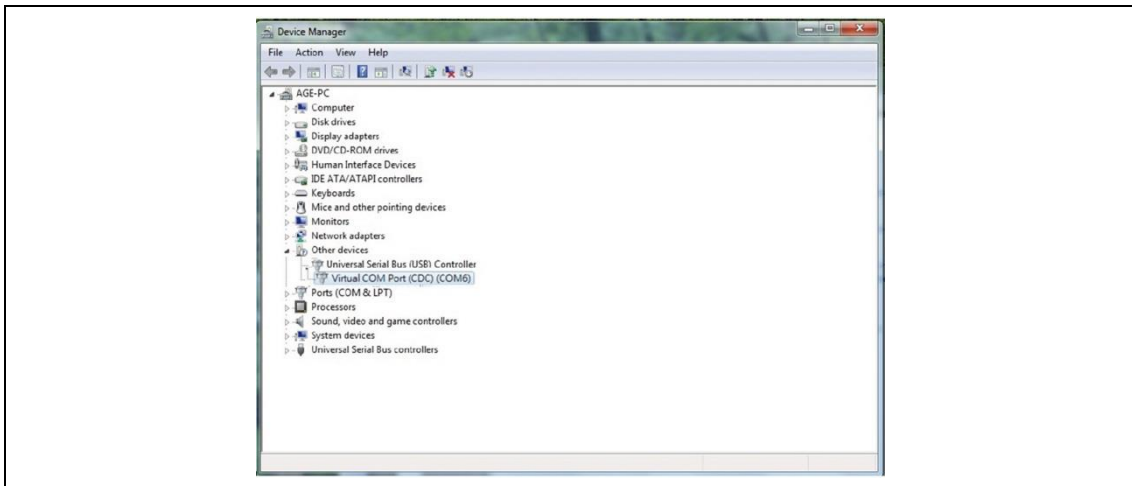

3 Software Guide

(1) Demo Kit Connection


- Open Flash_Burner_FullTemperature_20160401.exe
- If connection is correct, the COM port number will show up.
- Select the COM port and press "connect"

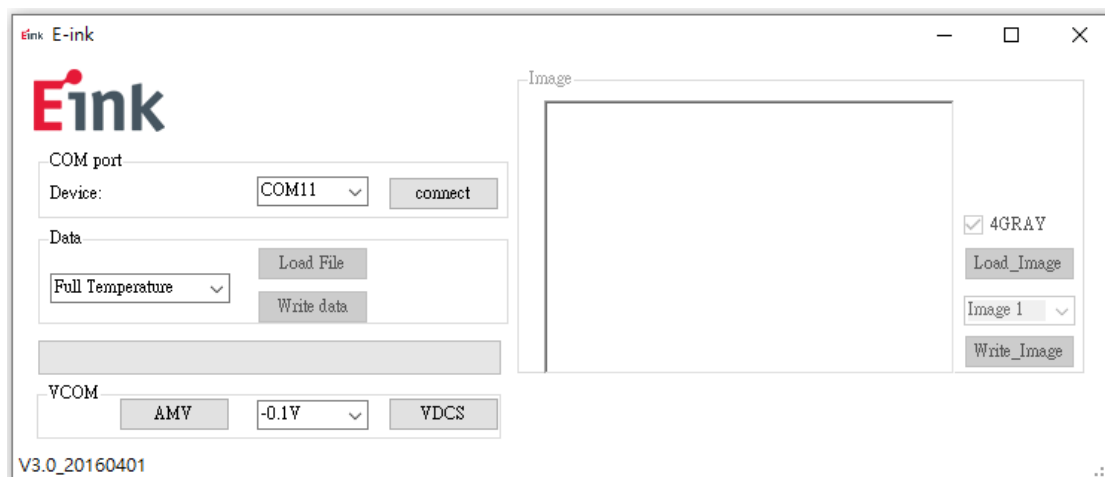

- * If connection is incorrect, the COM port will show COM1~COM6 (Please check driver for the EVK)

(2) Uploading Image

- Press "Load_Image" to select an image
- Select "image 1" ~ "image 7" to decide display sequence
- Press "Write_Image" to update image into the kit

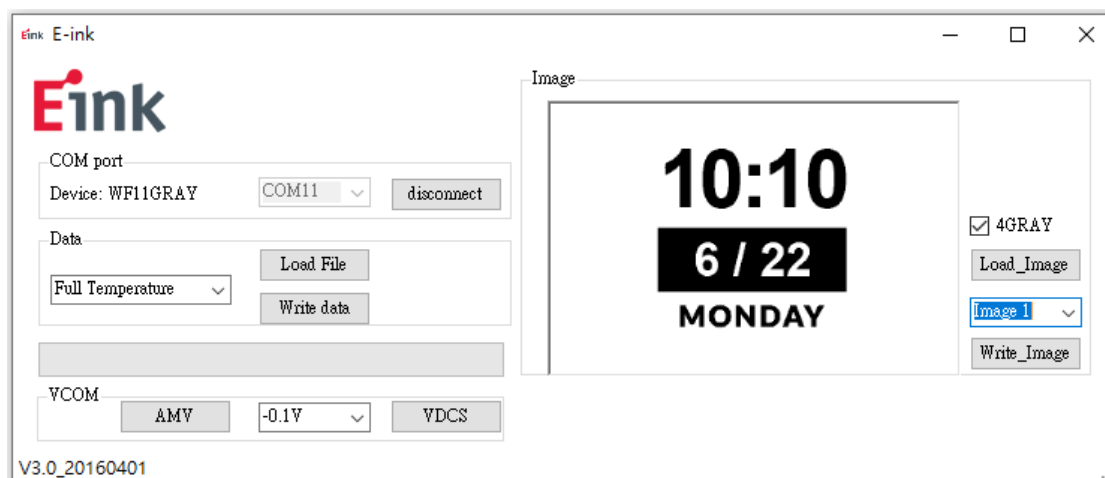

- * After all image are updated, you should press "disconnect" and un-plug/ plug Mini USB to restart the kit.

4 Troubleshooting

Below lists commonly asked questions.

| Num | Name | Description |
|-----|--|---|
| 1 | HULK_1.1" demo kit is not detected by the PC | Cause: USB cable is damaged |
| | | Solution: Replace the USB cable |
| 2 | Demo kit connection fails | Cause: Progress bar is not completed |
| | | Solution: Disconnect the demo kit from Mini USB and restart Flash_Burner_FullTemperature_20160401.exe |
| | | Cause: USB cable is damaged |

5 Contact Information

For more information, please visit

<http://www.eink.com>

For sales office addresses, please visit

http://www.eink.com/contact_sales.html

6 Legal Information

● Definitions

The document is a draft version only. The content is still under internal review and subject to formal approval which may result in modifications or additions. E Ink does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

● Right to make changes

E Ink reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice.

● Suitability for use

Products described in this document are intended for development purposes only and comes without any warranty. E Ink accepts no liability for inclusion and/or use of E Ink

products in commercial products or applications and therefore such inclusion and/or use is at the customer’s own risk. In no event shall E Ink be liable for any direct, indirect, incidental, special, exemplary, or consequential damages (including, but not limited to, procurement of substitute goods or services; loss of use, data, or profits; or business interruption) however caused and on any theory of liability, arising in any way out of the use of the software.

● Applications

Applications that are described herein for any of these products are for illustrative purposes only. E Ink makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

● No offer to sell or license

Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance, or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

● Trademarks

Notice: All referenced brands, product names, service names, and trademarks are the property of their respective owners.

● Revision History

| Version | Date | Pag | Description | Author |
|---------|-----------|-----|-------------|---------------|
| 0.1 | 2024/9/12 | | Initial | Jennifer Chen |
| | | | | |