




Quick start guide of Luvia EVK for 25.3" Spectra™ 3100 EPD

EVK Operating SOP


Demo Kit Hardware Description

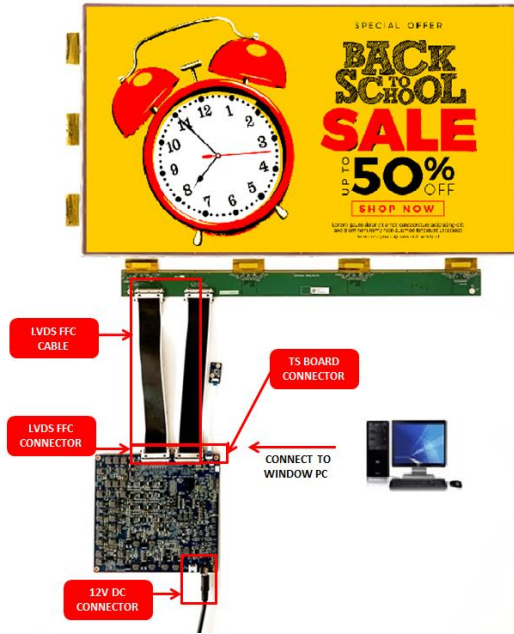


Connector	Function
12V DC CONNECTOR	DC 12V, for TCON power supply
LVDS FFC CONNECTOR	Connector for 25.3" Spectra™ 3100 and TCON board
TS BOARD CONNECTOR	Connect to thermal sensor board via 10cm FFC

Operating Instructions

① Connect to Physical Drive

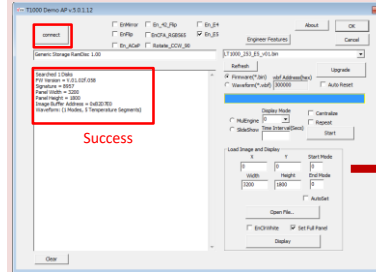


② Load image to L-T1000

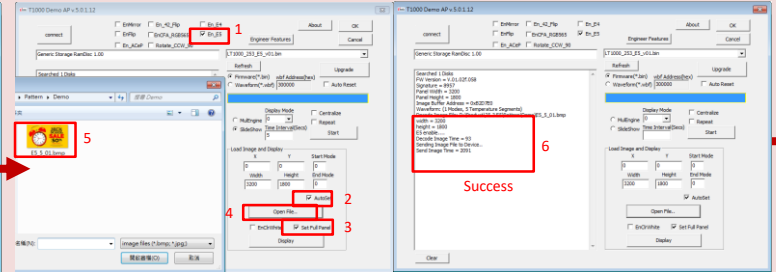

- 1) Select "En_E5".
- 2) Select "AutoSet" and "Set Full Panel".
- 4) Click "Open File.." to load the image.
- 6) Success load the image.

Single Image Mode


③ Display the image

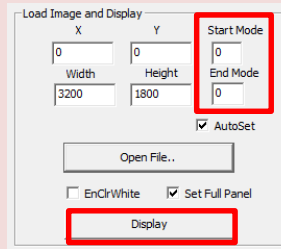

click "Display"

Slide Show Mode


③ Run slideshow

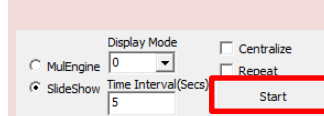

click "Start"

Engineer Features Description

Set/Get VCOM

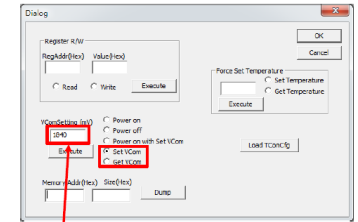

-1.84
Vcom values are marked on the PCB label