



EDo6oKC1

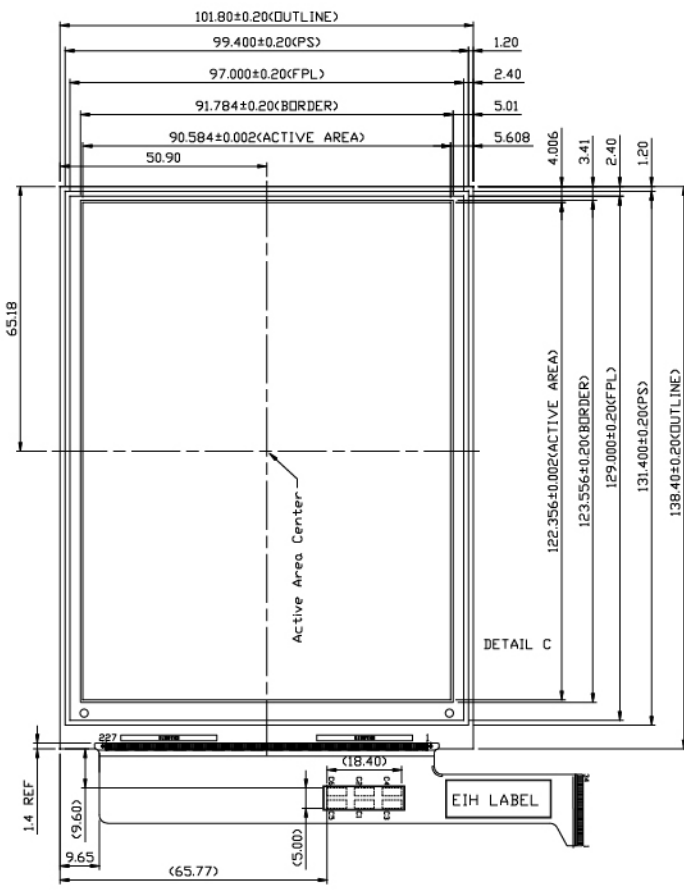

Mechanical Specifications

| Parameter | Specifications |
|-------------------|----------------------------------|
| Screen Size | 6 Inch |
| Active Area | 90.584 (H) × 122.356 (V) mm |
| Outline Dimension | 101.8(W) × 138.4(H) × 1.01(D) mm |

ICE Hardware Description

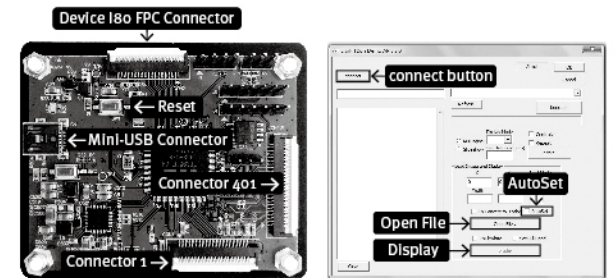

| Button/Option | Function |
|---------------|------------------------------|
| Connect | Check USB connection |
| Open File | Load image and display panel |
| AutoSet | Auto set the parameters |
| Display | Image review |


Assembly and Operating Instructions

- 1 Attach the 6" panel to ICE Connector 1
- 2 Connect the mini-USB cable to ICE
- 3 Connect the mini-USB cable to PC/NB
- 4 click **connect button**
- 5 click **AutoSet** option AutoSet
- 6 click **Open File** to select image
- 7 Image window shows up, click **OK** button
- 8 Click **Display** to show image

Disassembly Instructions

- 1 Disconnect the mini-USB from PC/NB
- 2 Disconnect the mini-USB cable from ICE
- 3 Detach the 6" panel from ICE


EDo68TG1

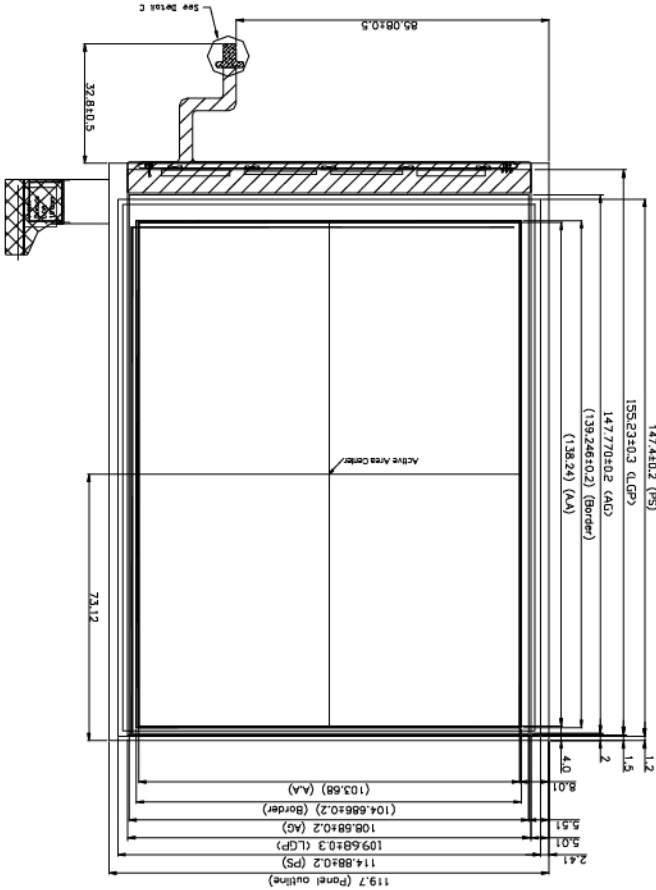

Mechanical Specifications

| Parameter | Specifications |
|-------------------|----------------------------------|
| Screen Size | 6.8 Inch |
| Active Area | 103.68(H) × 138.24 (V) mm |
| Outline Dimension | 119.7(W) × 158.5(H) × 1.84(D) mm |

ICE Hardware Description

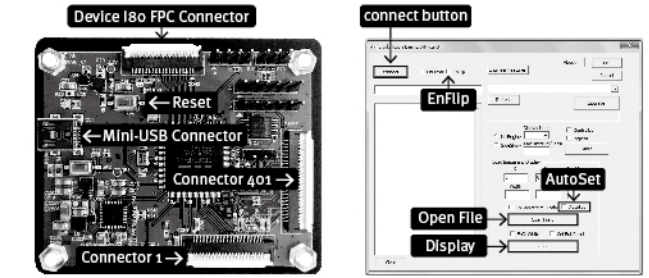

| Button/Option | Function |
|---------------|------------------------------|
| Connect | Check USB connection |
| Open File | Load image and display panel |
| AutoSet | Auto set the parameters |
| EnFlip | Flip image |
| Display | Image review |


Assembly and Operating Instructions

- 1 Attach the 6.8" panel to ICE Connector 4o1
- 2 Connect the mini-USB cable to ICE
- 3 Connect the mini-USB cable to PC/NB
- 4 Click **Connect** button
- 5 Check **EnFlip** option EnFlip
- 6 Check **AutoSet** option AutoSet
- 7 Click **Open File** to select image
- 8 Image window shows up, click **OK** button
- 9 lick **Display** to show image

Disassembly Instructions

- 1 Disconnect the mini-USB from PC/NB
- 2 Disconnect the mini-USB cable from ICE
- 3 Detach the 6.8" panel from ICE


EDo78KC1

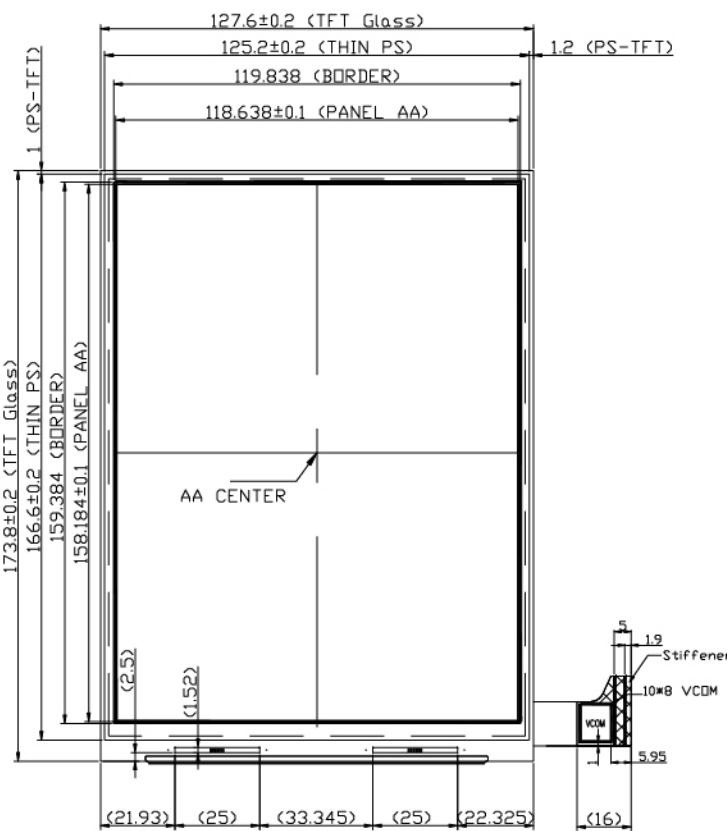

Mechanical Specifications

| Parameter | Specifications |
|-------------------|----------------------------------|
| Screen Size | 7.8 Inch |
| Active Area | 118.638 (H) × 158.184 (V) mm |
| Outline Dimension | 127.6(W) × 173.8(H) × 0.78(D) mm |

ICE Hardware Description

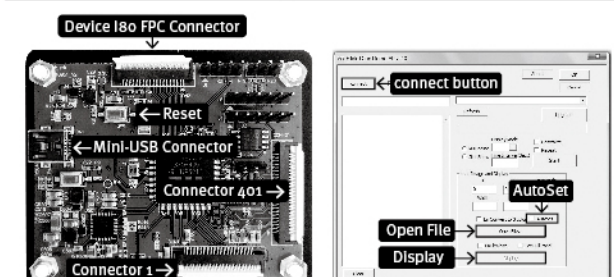

| Button/Option | Function |
|---------------|------------------------------|
| Connect | Check USB connection |
| Open File | Load image and display panel |
| AutoSet | Auto set the parameters |
| Display | Image review |

Assembly and Operating Instructions

- 1 Attach the 7.8" panel to ICE Connector 4o1
- 2 Connect the mini-USB cable to ICE
- 3 Connect the mini-USB cable to PC/NB
- 4 click **connect button**
- 5 click **AutoSet** option AutoSet
- 6 click **Open File** to select image
- 7 Image window shows up, click **OK** button
- 8 Click **Display** to show image

Disassembly Instructions

- 1 Disconnect the mini-USB from PC/NB
- 2 Disconnect the mini-USB cable from ICE
- 3 Detach the 7.8" panel from ICE